


TECHNICAL DATA SHEET # 19 LA

WIRING SCHEMATIC FOR DELAYED EGRESS

NOTE: THE RED & GREEN WIRES SHOWN ARE WIRED TO THE DELAYED EGRESS LOGIC

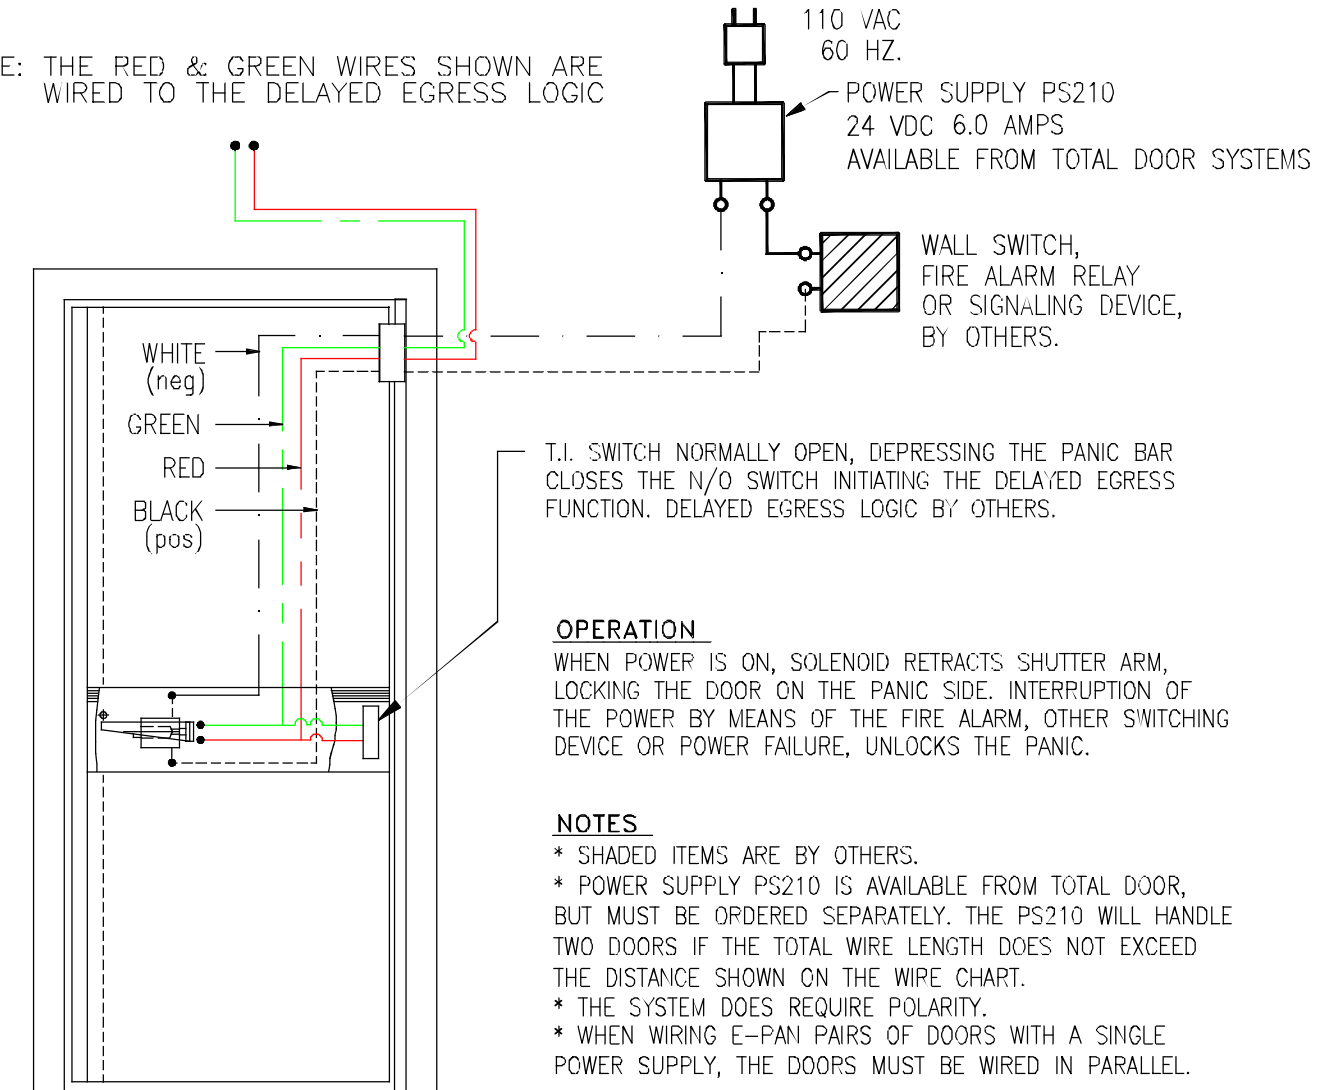

CAUTION

* CHANGING THE WIRING FROM THAT SHOWN IN THE SCHEMATIC ABOVE, WILL VOID THE LIMITED WARRANTY.
* THE TOTAL DOOR CAN UNLATCH & RELATCH IN APPROX. 1/50TH OF A SECOND. IT IS NECESSARY FOR THE WALL SWITCH TO STAY ON FOR AT LEAST 2 SECONDS OR THE OPERATOR MAY NOT BE ABLE TO OPEN THE DOOR. IT IS THE RESPONSIBILITY OF THE SUPPLIER TO PROVIDE THE DELAY ON THE BREAK FEATURE.

RECOMMENDED MAX. LENGTH OF WIRE CONNECTING THE POWER SUPPLY TO THE DOOR

WIRE GAUGE	2 CONDUCTOR CABLE LENGTH	SINGLE CONDUCTOR WIRE LENGTH
20	20'	40'
18	30'	60'
16	50'	100'
14	80'	160'
12	125'	250'