


TECHNICAL DATA SHEET # 60A

DOOR CONSTRUCTION FOR POSITIVE PRESSURE B, C & 20 MIN. LABELS

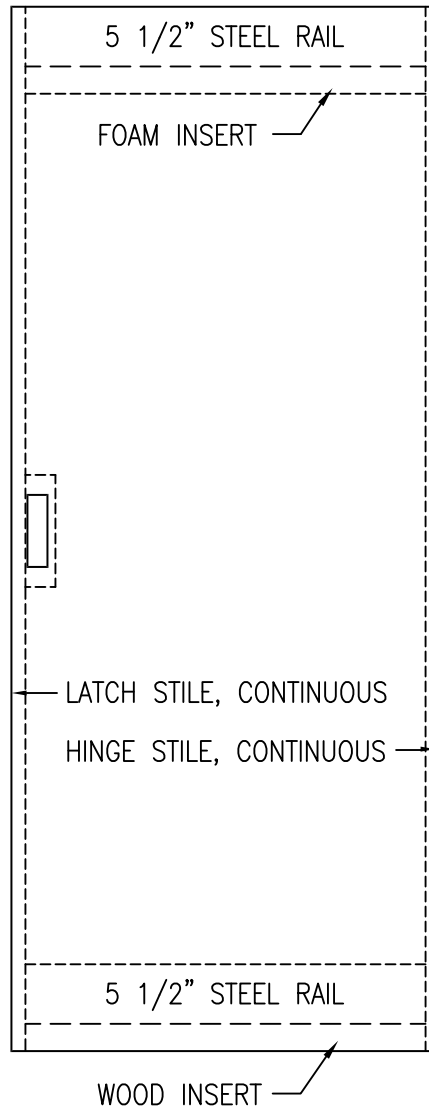

ELEVATION

FIRE LABELS MAY BE
1-1/2 HR., 3/4 HR. OR 20 MIN.
AND TEMPERATURE RISE
AND SMOKE AND DRAFT

FACES MAY BE
20 OR 18 GA. STEEL

FINISHES MAY BE;
PRIME, POLYURETHANE, WOOD VENEER,
VINYL, ST. STEEL., BRASS OR BRONZE

CORE MAY BE
POLYSTYRENE (STD)
TEMP. RISE, 250°